


DHM54T35-TP

405-430W

All-black Aesthetic
TOPCon High-efficiency Photovoltaic Module

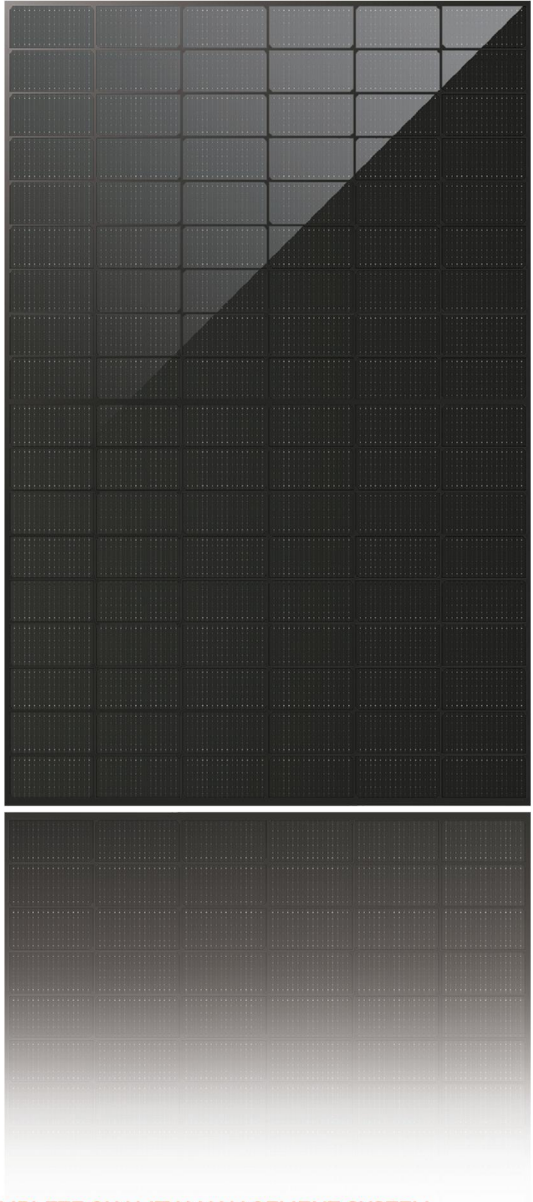

- Using the latest TOPCon 16BB silicon cells, the output power reaches 430W with a conversion efficiency reaching 22.02%.
- The same area of higher power, light weight, easy to install
- Ultra-low attenuation rate, first year attenuation $\leq 1\%$, 2-30 years linear attenuation $\leq 0.4\%$
- Fully automatic production line with full quality inspection to ensure product assurance
- Components are resisting wind loads of 2400pa and snow loads of 5400pa

DAHAI SOLAR is a renewable energy enterprise founded in 2011 , with 5GW high efficiency solar module production capacity, 10GW silicon production capacity. Adhering to the brand concept of "new energy, new world", Dahai solar has always been committed to doing a stand out in the photovoltaic industry, transforming light with ingenuity and provide green energy to everybody.




30 YEAR LINEARITY POWER OUTPUT WARRANTY



25 YEARS OF EXCELLENT PRODUCTS MATERIAL AND PROCESS WARRANTY

30 YEAR EXCESS LINEAR POWER OUTPUT WARRANTY

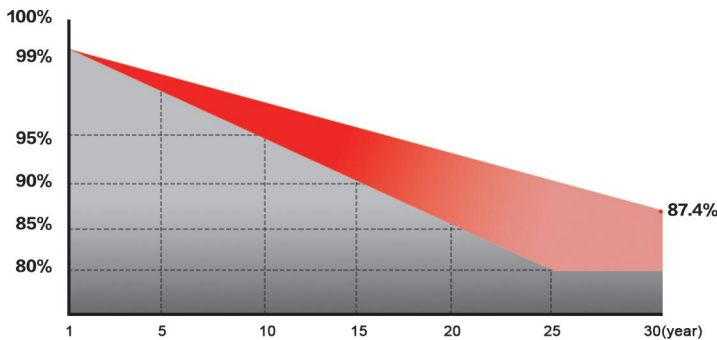

The power attenuation shall not exceed 1% in the first year and 0.4% in the following years.

COMPLETE QUALITY MANAGEMENT SYSTEM AND PRODUCT CERTIFICATION



CQC TUV CE
IEC 61215, IEC 61730
ISO 9001:Quality Management System
ISO 14001:Environmental Management System
ISO 45001:Occupational Health And Safety Management System



Address: Guangrao, Dongying, China
Internet site: www.dahaisolar.com

Maximum efficiency

430W

Power tolerance

0~+5W

Highest component conversion efficiency

22.02%

First year attenuation

≤1.0%


Decay over the years

≤0.4%
MECHANICAL PROPERTIES

Battery type	Monocrystalline-TOPCon
Component weight	21.5kg
Component Size	1722×1134×30mm
Number of Cells	108 (6x18)
Cable cross-sectional area	4mm ²
Junction Box	IP68, 3 diodes
Connector	MC4-EVO2
Packaging information	36 pieces/pallet 936 pieces /40 'container

WORKING PARAMETERS

Maximum system voltage	1500V DC
Operating temperature	-40°C~ +85°C
Maximum fuse current rating	25A
Maximum static load, front	5400pa
Maximum static load,back side	2400pa
nominal battery operating temperature	45±2°C
Application Level	classA

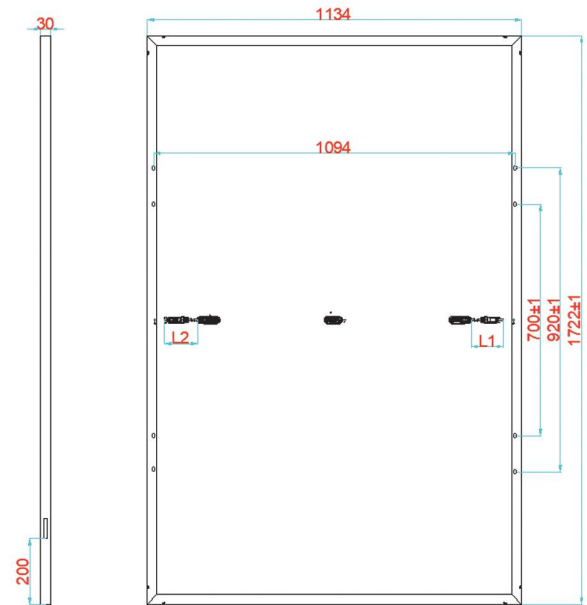
TEMPERATURE CHARACTERISTICS

Power	-0.350%/°C
Open circuit voltage	-0.274%/°C
Short-circuit current	0.044%/°C

ELECTRICAL PERFORMANCE PARAMETERS UNDER STC

Modle	DHM54T35-405/TP	DHM54T35-410/TP	DHM54T35-415/TP	DHM54T35-420/TP	DHM54T35-425/TP	DHM54T35-430/TP
Maximum power (W)	405	410	415	420	425	430
Voltage at maximum power point (VMP/V)	31.35	31.65	31.85	32.05	32.25	32.45
Current at maximum power point (IMP/A)	12.92	12.95	13.03	13.10	13.18	13.25
Open circuit voltage (VOC/V)	37.13	37.53	37.78	38.03	38.28	38.53
Short circuit current (ISC/A)	13.83	13.90	13.94	13.99	14.04	14.09
Component efficiency [%]	20.74%	21.00%	21.25%	21.51%	21.76%	22.02%
Power tolerance (W)	0~+5					
Standard test environment	Irradiance 1000W/m ² , cell temperature 25°C, spectrum AM1.5					

Note: Due to continuous innovation, research and product upgrading, the parameters in this specification are not just a component, but can only be used for comparison between different types.

ELECTRICAL PERFORMANCE PARAMETERS UNDER NOCT

Modle	DHM54T35-405/TP	DHM54T35-410/TP	DHM54T35-415/TP	DHM54T35-420/TP	DHM54T35-425/TP	DHM54T35-430/TP
Maximum power (W)	301	305	309	312	316	320
Voltage at maximum power point (Vmp)[V]	29.31	29.55	29.73	29.91	30.12	30.33
Current at maximum power point (Imp)[A]	10.28	10.32	10.39	10.45	10.50	10.55
Open circuit voltage (Voc)[V]	35.16	34.94	35.16	35.36	35.56	35.76
Short circuit current (Isc)[A]	11.55	11.43	11.55	11.61	11.67	11.75
Nominal cell operating temperature(NOCT)	Irradiance800W/m ² , ambient temperature20°C, spectrum AM1.5G, wind speed 1m/s					